

HS-SE Switching & Connection

Stainless Steel Enclosure

PRODUCT DATA



Typical Applications

- For use in conditions where for health and safety, guarding etc., a reading is required to be taken with a portable data-collector. The SE Series provides a common point to terminate up to 100 accelerometers, and with the aid of a rotary switch, readings can be taken. The power for the sensors comes from the data-collector.


Protecting...

Fans, Motors, Pumps, Paper and Steel Machines, Air Handling Units, Machine Tools, etc.

Technical Performance

Inputs	Accelerometer
Output	AC, 4-20 mA dual, AC and Temp BNC standard 2 pin MS and TNC optional
Enclosure	Stainless Steel GRP and Painted Steel on request
Sealing	IP66
Door	Twist handle
Termination	Klippon type
Glanding	Box fitted with glands Other configurations available on request
Labelling	Channel locations, can be customised
Size	See 'How to order' table
Switching	Gold contact rotary switch (individual BNCs can be supplied if preferred.)
Mounting	Brackets are supplied (mounting drgs available on request)
Options	GRP, Painted Steel, Dual input, other connectors, single-point connection brackets

How to order

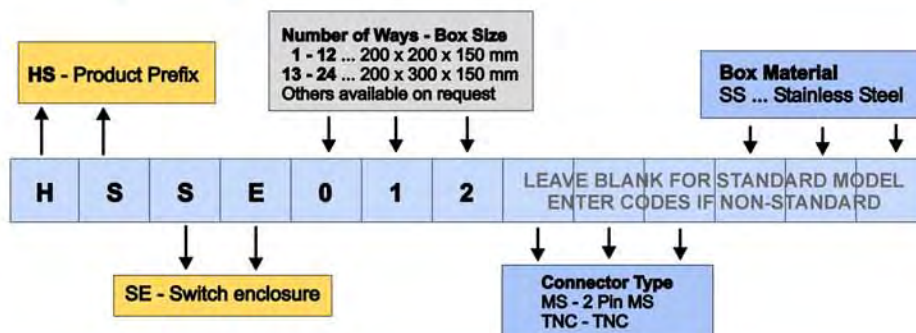

We reserve the right to alter the specification of this product without prior notice.

TS059 Iss02